





15.60m (51ft 2in) Working height

9.60m (31ft 6in) Working outreach

1.50m Narrow Chassis

Allows operation in confined areas

Bi-Energy Power Available Optimising utilisation

225kg SWL Extra capacity for tools and materials

Telescopic Upper Boom

Greater accuracy when positioning platform

Platform Rotation & Fly-Boom Improving manoeuvrability on site





**** * * ***





The Nifty **Height Rider 15N** offers one of the best working envelopes in its class. Designed using the latest computer technology, it delivers unrivalled working outreach combined with pinpoint accuracy when positing the platform. A super narrow base as standard with the option of Bi-Energy power makes it ideal for a wide range of applications.


100°

1.21m


4.40m

SAFETY FEATURES

- Manual Recovery with Hand Pump
- Automatic Failsafe Brakes
- CE Mark
- Tilt Alarm
- Solid Tyres
- Dual Harness Points
- Dual Controls (platform & base)
- Lock Valves on all Hydraulic Cylinders

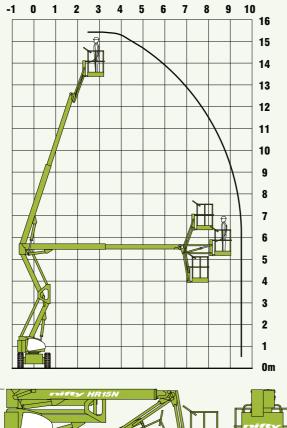









With more outreach than any other machine in its class and a base width of only 1.50m, the **HR15N** in one of the most effective and versatile self propelled platforms available.

SPECIFICATIONS

15.60m	51ft 2in
13.60m	44ft 7in
9.60m	31ft 6in
360°	
150°	
1.50m	4ft 11in
2.10m	6ft 11in
5.00m	16ft 5in
6.30m	20ft 8in
6,680kg*	14,700lbs*
1.21m	3ft 11in
4.40m	14ft 5in
100°	
225kg	500lbs
1.50m x 0.70m	4ft 11in x 2ft 4in
4 kph	2.5 mph
25%	
Fully proportional electric over hydraulic	
Battery Only	
LPG Only	
Bi-Energy - Battery &	Diesel
2	
	13.60m 9.60m 360° 150° 1.50m 2.10m 5.00m 6.30m 6,680kg* 1.21m 4.40m 100° 225kg 1.50m x 0.70m 4 kph 25% Fully proportional ele Battery Only LPG Only

* Weights may vary according to specification, please confirm before ordering.

Manufacturers of trailer mounted, self propelled and vehicle mounted platforms.



NIFTYLIFT PTYLTD

Supplied by:

