

SELF PROPELLED ACCESS PLATFORM



12.20m (40ft)Working height

6.10m (20ft) Working outreach

Telescopic Upper Boom

Greater accuracy when positioning platform


1.50m Chassis Available Improved narrow aisle access

Weight Under 3.1 Tonnes
Low cost transportation

Fully Proportional Hydraulic Controls

Simple, reliable & easy to maintain

Bi-Energy AvailableOptimising Utilisation









Heightric


The Nifty Height Rider 12 is one of the most versatile and reliable machines in its class. It is specifically designed to give maximum reach performance from the lightest, most compact base possible. A telescopic upper boom gives improved accuracy when positioning the platform and superb manoeuvrability makes it ideal for a wide range of applications.


2.22m

SAFETY FEATURES


- Automatic Failsafe Brakes
- Tilt Alarm
- Foam Filled or Solid Tyres
- Manual Descent with Hand Pump
- Dual Controls (Platform & Base)
- Lock Valves on all Hydraulic Cylinders
- **Dual Harness Points**
- CE Mark

Supplied by:

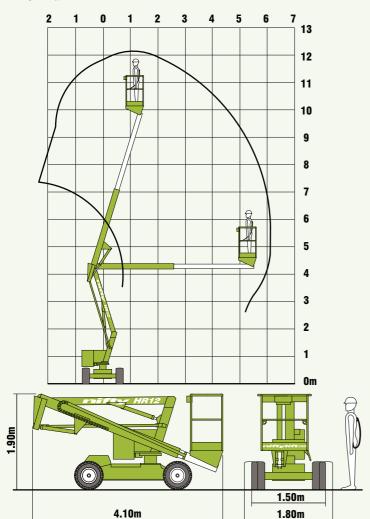







perfect all-rounder.

SPECIFICATIONS

Working Height	12.20m	40ft
Platform Height	10.20m	33ft 5in
Working Outreach	6.10m	20ft
Slew	360°	
Width - Standard	1.80m	5ft 11in
- Narrow	1.50m	4ft 11in
Height	1.90m	6ft 3in
Length	4.10m	13ft 5in
Minimum Weight - Standard	2,630kg*	5,800lbs*
- Narrow	3,060kg*	6,750lbs*
Turning Radius - Inside	2.22m	7ft 3in
- Outside	4.20m	13ft 9in
Platform Capacity	200kg	440lbs
Platform Size	1.10m x 0.65m	3ft 7in x 2ft 2in
Drive Speed	2.1mph	3.4 kph
Gradeability	25%	
Control System	Fully Proportional Hydraulic	
Power Options	Battery Only	
	Petrol, Diesel or LPG Only	
	Bi-Energy (Engine & Battery)	
d.		

^{*} Weights may vary according to specification, please confirm before ordering.



Manufacturers of trailer mounted. self propelled and vehicle mounted platforms.

NIFTYLIFT PTYLTD 11 Kensington Drive Tomago NSW 2322 Australia

www.niftylift.com.au e-mail: jking@niftylift.com.au

Tel.: +61 (0) 2 4964 9765 Fax.: +61 (0) 2 4964 9714